

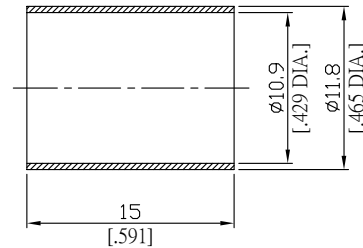


UHF Jack (Female) Cable Connector

UHF2CN0-G213-214AA/H4

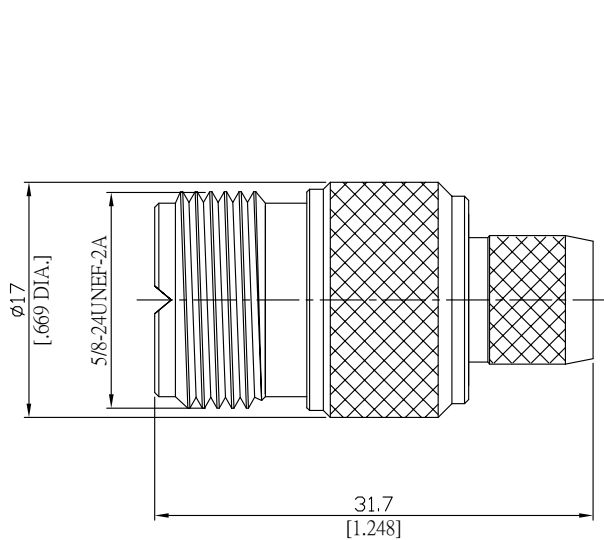

RG213

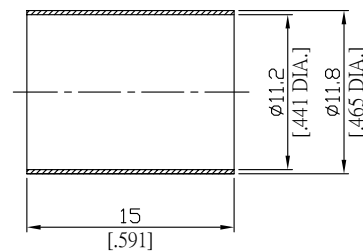

RG214

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**  
According to IEC 60169-12

**Electrical Data**  
Impedance non-constant  
Frequency DC to 300 MHz

*- Limitations are possible due to the used cable type and manufacturing method -*

**Mechanical Data**  
Coupling mechanisms Screw-lock  
Centre contact Solder or Crimp  
Cable entry Crimp

**Environmental Data**  
Temperature range -55°C to +149°C  
RoHS compliant  
REACH compliant

Material And Plating		
Connector parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	


**Suitable Cables**  
RG-213, RG-214, RG-393

**Packing**  
Single or 100

UHF Jack (Female) Cable Connector

UHF2CN0-G213-214AA/H4

**Cable Stripping Dimensions**

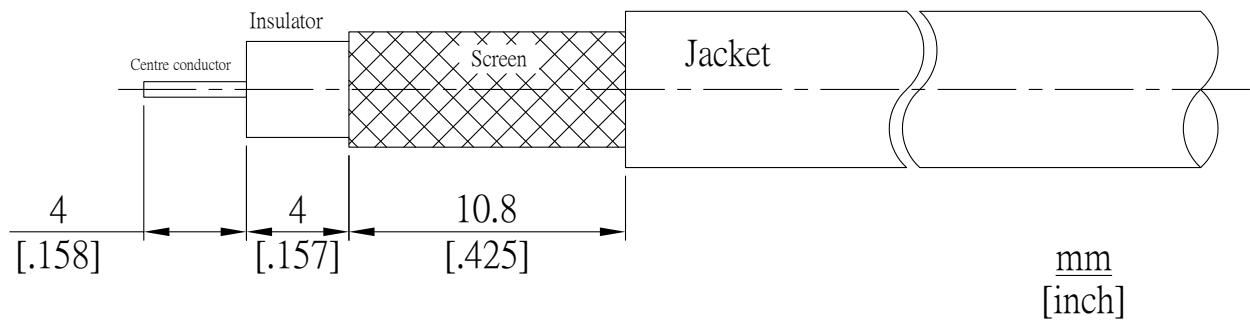

**Crimp Dimensions [HEX]**

Crimp ferrule 10.90mm [.429 inch]  
Centre contact 2.54mm [.100 inch]