


RG 213 U-ZH

50 OHM RF COAXIAL CABLE

MANUFACTURED IN COMPLIANCE WITH MIL-C-17F STANDARDS
COMPLIANCE IEC 60754-1 IEC 60754-2 IEC 61034-2

Class CPR **E_{ca}**

CU 7 x 0,75 mm PE ø 7,25 mm CU ø 8,00 mm Pet h. 27 mm LSZH ø 10,3 mm

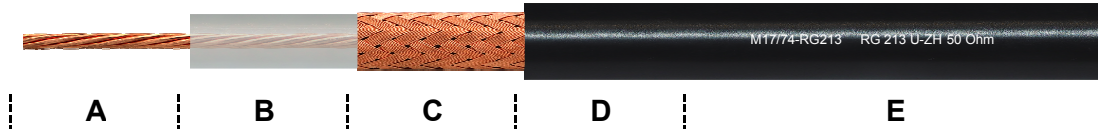

MECHANICAL DATA

A	INNER CONDUCTOR	PLAIN COPPER	7 x 0,75 mm
B	DIELECTRIC	LOW DENSITY POLYETHYLENE	ø 7,25 ± 0,18 mm
C	BRAID	PLAIN COPPER	192 x 0,18 mm
		- COVERAGE	97%
D	NON-MIGRATING	POLYESTER TAPE	h. 27 mm
E	SHEATH	FLAME RETARDANT NON-CORROSIVE		ø 10,3 ± 0,18 mm
		THERMOPLASTIC FREE OF HALOGENS		
	- COLOUR	BLACK - RAL 9004		
	- PRINTING	M1774-RG213 MIL-C-17G RG 213 U-ZH 50 Ohm LSZH		
		MADE IN ITALY CE 56 WEEK/YEAR EN 50575:2014 + A1:2016 Eca		

MINIMUM BENDING RADIUS (mm)

- SINGLE	ø EXTERNAL X 5
- REPEATED	ø EXTERNAL X 10

TEMPERATURE RANGE

-30 °C / +70 °C

CABLE WEIGHT (Kg/Km)

- COPPER	77,4
- PLASTIC	87,8
- TOTAL	165,7

ELECTRICAL PROPERTIES at 20°C

IMPEDANCE 50 ± 2 Ohm

CAPACITANCE 100 pF/m

VELOCITY RATIO 66%

RESISTANCE

- INNER CONDUCT.	6 Ohm/Km
- BRAID	4,4 Ohm/Km

TENSION

- SHEATH	5,5 kV
- SPARK TESTING	

ATTENUATIONS dB/100 m.

		dB	W
5	MHz	1,2	
10	MHz	1,8	
50	MHz	4,3	
100	MHz	6,4	
200	MHz	9,5	
400	MHz	13,7	

MAX. POWER RATING W

		dB	W
500	MHz	15,3	
600	MHz	16,9	
800	MHz	20,4	
1000	MHz	23,2	
1350	MHz	28,4	
1500	MHz	30,4	

		dB	W
1750	MHz	33,7	
2150	MHz	38,9	
2250	MHz	39,7	
2500	MHz	42,7	
2750	MHz	45,7	
3000	MHz	48,9	

STRUCTURAL RETURN LOSS dB

30 ÷ 300	MHz	>31	1000 ÷ 2000	MHz	>24
300 ÷ 600	MHz	>28	2000 ÷ 3000	MHz	>22
600 ÷ 1000	MHz	>27 ÷	MHz	-

SCREENING EFFECTIVENESS dB

100 ÷ 900	MHz	>57
900 ÷ 2000	MHz	-
2000 ÷ 3000	MHz	-

The producer reserves himself to make modification on the item without any notice.