




Adaptor plug /plug  
FME plug (male) / FME plug (male)

AD-E1E15A/H4-H4

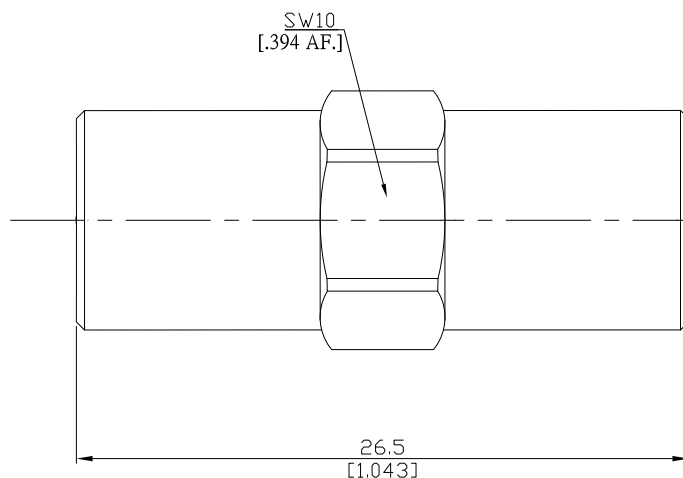

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

#### Interface

According to N/A

#### Electrical Data

Impedance 50 Ω

Frequency DC to 2.5GHz

#### Mechanical Data

Coupling mechanisms Screw-lock

Weight N/A

#### Environmental Data

Temperature range -65°C to +165°C

RoHS compliant

#### Material And Plating

Piece Parts (FME)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

Piece Parts (FME)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

#### Packing

Single or 100