


UWB-I 380-6000

Ultra Wideband Omnidirectional Antenna capable of supporting TETRA, GSM, DCS, PCS, UMTS, WiFi 2.4 an

Beschreibung

- > Ground plane independent indoor DAS antenna .
- > Omnidirectional coverage for the 380 - 6000 MHz band.
- > Installation from above or below the ceiling.
- > Provided with external coaxial cable with N-female connector.
- > No need for external ground plane.
- > Two installation options.

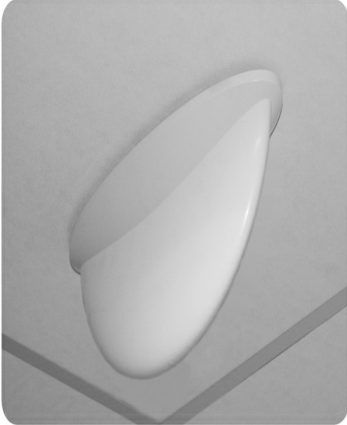

BESTELLUNG

Model	Produkt Nr.
UWB-I 380-6000	100000545

SPEZIFIKATIONEN

Elektrisch DE	
Modell	UWB-I 380-6000
Frequenz	380 - 6000 MHz
Antennentyp	Low profile multiband
Polarisation	Vertikal
Muster-Art	Omnidirektional
Impedanz	50 Ω
Gewinn	-2.2dBd / 0dBi
SWR	< 2.0:1
Max. Eingangsleistung	50 W
Passive Intermodulation	< -140 dBc (2 x 37dBm)

Mechanisch DE	
Anschlusstyp	N(f)
Materialien	Radome: Lexan Flame retardent: UL 94 HB recognized Chasis : Aluminium
Kabel	RG400 (length : 400 mm)
Farbe	White (RAL 9003)
Masse	107 / 325 mm
Höhe	146 mm / 5.75 in.
Gewicht	0.65 kg / 1.43 lb

Umwelt	
Betriebstemperaturbereich	-30 °C to +70 °C

