


Technical Data sheet

Adapter
BNC-(m) to BNC-(m)

03.04.050

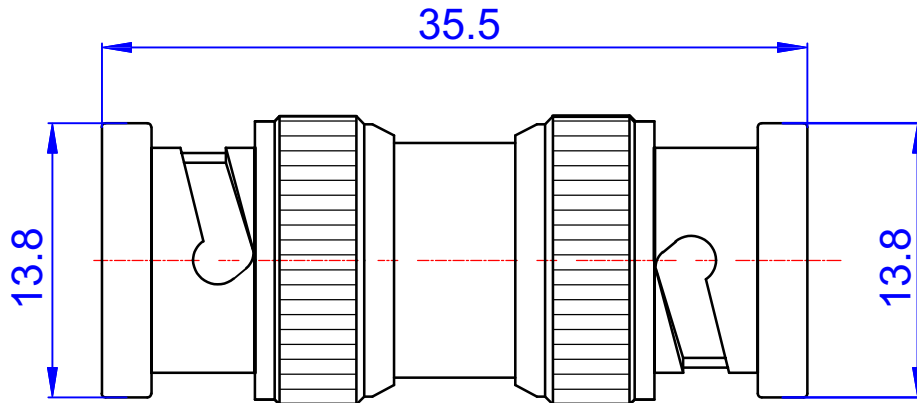

Site 1: BNC-male
Site 2: BNC-male

ALL DIMENSIONS IN MILLIMETERS

Electrical characteristics

Impedance	50 Ω
Frequency Range	DC - 4.0 GHz
VSWR	≤ 1.1 (0-3 GHz)
Intermodulation (PIM)	-
RF Leakage @ 1GHz	≥ 90 dB
Dielectric withstanding voltage (at sea level)	1500V
Working Voltage (at sea level)	1000V
Insulation resistance	≥ 5000 M Ω

Mechanical characteristics

Coupling nut torque (recommended)	-
Coupling nut retention force	≥ 450 N
Durability (matings)	≥ 500
Temperature range	-55°C to +155°C

Type	Material	Plating
Center Conductor	Brass	Gold
Insulation	PTFE	-
Body	Brass	Nickel
Gaskets	Silicone rubber	-