

6 element Yagi 140-156 MHz

DESCRIPTION

A 6-element VHF Yagi antenna for PMR/Trunked Radio and Broadcast applications. Produced to the highest quality standards, these robust antenna designs will ensure reliable operation in harsh environmental conditions.

- Former Javbeam brand product.

SPECIFICATIONS

Electrical	
Frequency	140 - 156 MHz
3 dB Beamwidth, H-Plane	64 °
Polarisation	Linear (Vertical or Horizontal)
3 dB Beamwidth, E-Plane	56 °
Impedance	50 Ω
Gain	8.5 dBd (10.7 dBi)
VSWR	< 1.5:1
Maximum Input Power	150 W
Front-To-Back Ratio	> 16 dB
Antistatic Protection	All metal parts DC-grounded (Connector shows a DC-short)

Mechanical	
Input Connection(s)	N(f) on 3m RG213/U cable
Materials	Boom, 32 mm dia. aluminium elements, 12.7 mm dia. aluminium balun, Fully moulded enclosure
Length	2700 mm / 106.30 in.
Wind Load	205 N (160km/h)
Weight	4.5 kg / 9.92 lb
Mounting Bracket	3202078/68 + 0900174/00 (Ordered Separately)
Alternate Mounting Bracket	0900912/00, 0302032/68, or 0300064/00 + U-Bolts to match mounting pipe diameter (Ordered Separately)


ORDERING

Type	Product No.	Frequency
6 element Yagi 140-156 MHz	7042140	140 - 156 MHz
Galvanised steel crossover bracket 32/50mm	0900912/00	
Pressed steel cross clamp 2" x 1-1/4" (JBL73)	0302032/68	
Cast aluminium cross clamp, circular	0300064/00	
M8 x 50mm (2") U-Bolts (1 Pair)	4884036/00	
M8 x 75mm (3") U-Bolts (1 Pair)	4884076/00	
Fixed norstel / coupler clamp (cross clamp)	3202078/68	
Increasing sleeve 1"-1-29/32"	0900174/00	




DIAGRAM

RADIATION PATTERNS

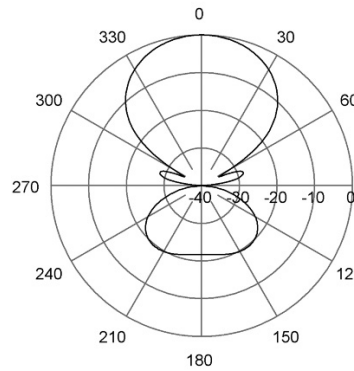

E-Plane | 148 MHz

RADIATION PATTERNS

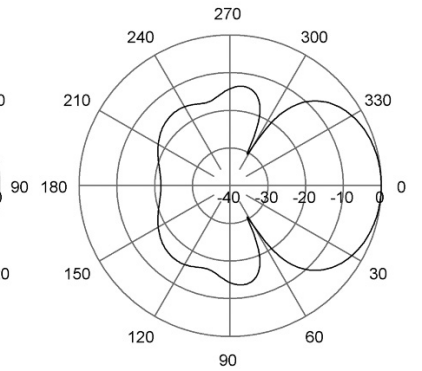

H-Plane | 148 MHz

